




PONTI SU RUOTE A TORRE / ALLUMINIO

ULYSSE

ALUMINIUM
PROFESSIONAL
INTENSIVE USE

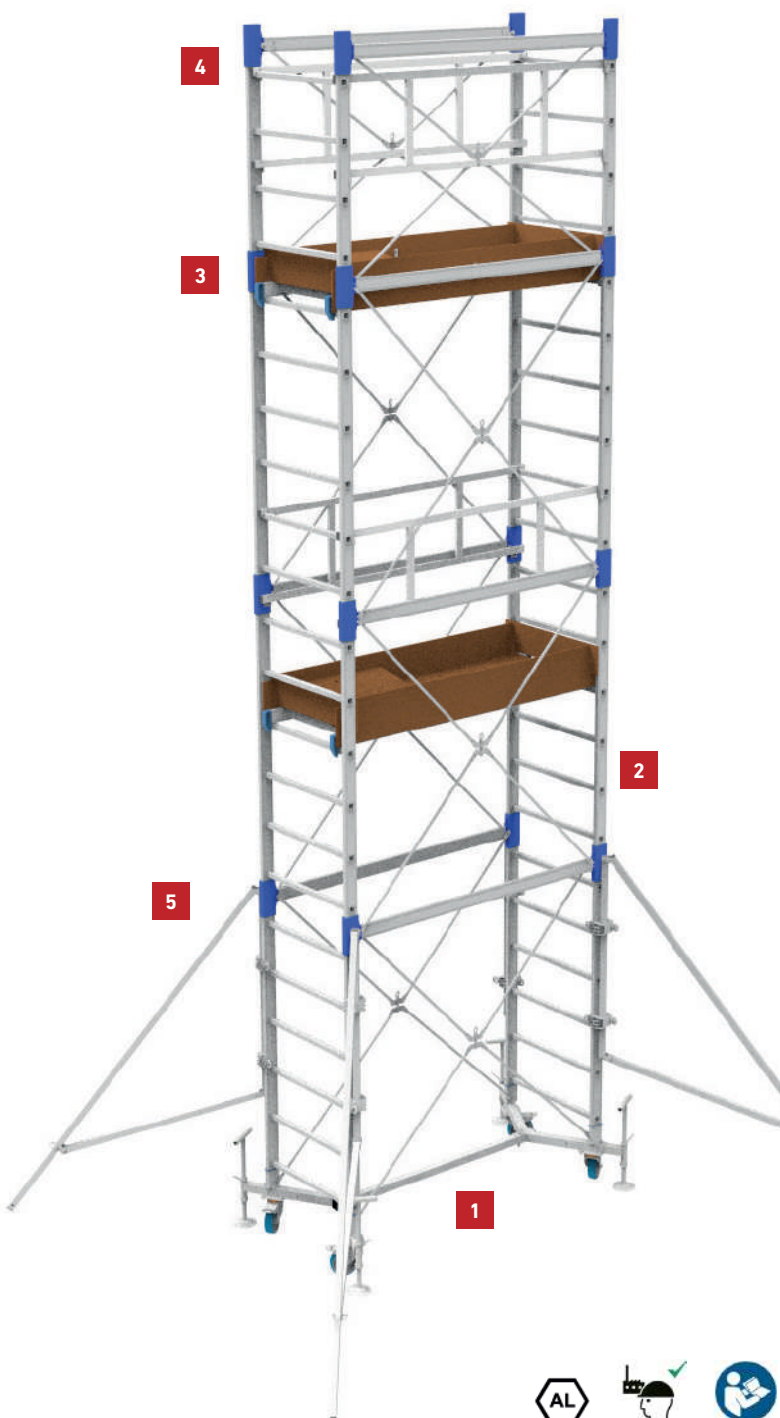

Ø 150 mm wheels with brakes, Steel base, allow use without ballast. The professional aluminum scaffolding. Fast assembly thanks to the easy connector. Work platform with trapdoor in resin and aluminum frame. Use without anchor to the wall and without ballast.



Exclusive
Turnbuckle
CODE 20255



Base
75x180
CODE 50085
Kg 42 - Mc 0,25



Tower m 1,70
CODE 50086
Kg 17 - Mc 0,23



Top tower m 1,20
CODE 50087
Kg 20 - Mc 0,16

OPTIONAL



Tower dimensions

m 0,75 x 1,80






Total load permitted

Kg 204



EN 1004-1 CLASSE "3"
EN 1004-1 class "3"

H (m)

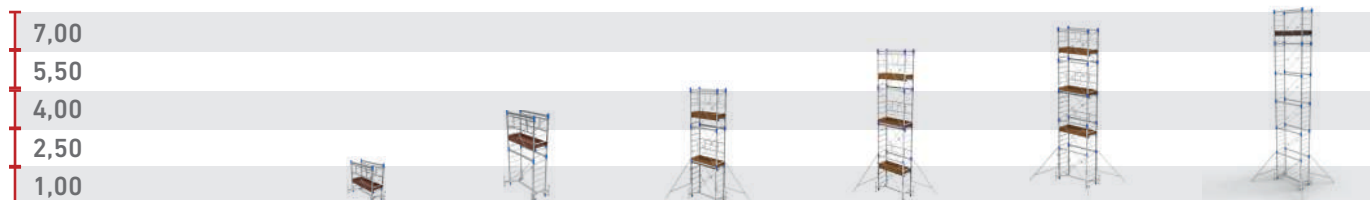

CODE				UY.DL.75.180.03	UY.DL.75.180.04	UY.DL.75.180.05	UY.DL.75.180.06
D.Lgs. 81/08	€						
CODE		UY.EN.75.180.01	UY.EN.75.180.02	UY.EN.75.180.03	UY.EN.75.180.04	UY.EN.75.180.05	
EN 1004-1:2021	€						
H max mobile tower	m	2,05	3,70	5,40	7,10	8,80	10,45
H max work platform	m	0,80	2,45	4,15	5,80	7,50	9,20
50085 Base	n.	1	1	1	1	1	1
50086 Tower / m 1,70	n.	1	2	3	4	5	6
50083 4 stabilizers	n.	0	0	1	1	1	1
D.LGS. 81/08 with anchorage DL 81/2008							
50088 Work Platform	n.			1	1	1	1
50089 Guard Rail	n.			1	1	1	1
Peso / Mc Weight / Mc	kg/mc			150/1,30	110 / 1,40	110 / 1,80	136 / 1,90
EN 1004-1 without anchorage 1004-1							
50088 Work Platform	n.	1	1	2	3	3	
50089 Guard Rail	n.	1	1	2	3	3	
Weight / Mc	kg/mc	56/ 0,90	61 / 1,15	159 / 1,60	124 / 1,80	132 / 2,05	



Work platform
CODE 50088
Kg 21 - Mc 0,10



Guardrail
CODE 50089
Kg 3 - Mc 0,05



Stabilizers
CODE 50083
Kg 45 - Mc 0,01



EXCLUSIVE
Turnbuckle

